



Torque Meters
KTM-10, KTM-100



KTM-10/KTM-100 (NEW)

- LED can identify the test range of torque setting needed by user. If the result is not complying to torque range setting, warning light would glow.
- USB 1.0 connector is only used for data output ; it is convenient for user to work with computer
- Auto-zero can be selected and zero reset becomes unnecessary for user.
- Automatically tests values about maximum, minimum and mean


Specifications

Model		KTM-100	KTM-10	KTM-50S	KTM-CSH
Measuring Range	(kgf.cm)	1.5~100.0	0.15~10.0	0.5~50.0	30.0~200.0
	(Lbf.in)	1.5~90.0	0.15~9.0	0.434~43.40	30.0~180.0
	(N.m)	0.15~10.00	0.015~1.0	0.04~4.90	3.00~20.00
Accuracy		Within ±0.5%			
Power Supply		1.2V batteryX5			
Charging Time		Within 8 hours			
Continuous Operation At Full Charge		About 30 hours			
Battery Life		Rechargeable 300 times or more			
Dimensions (mm)		123X230X65(H)			130X80X34(H)
Weight (kg)		About 2.0			1.5
Special Charger		Input AC 120V, 220~240V Output DC 12V 500mA		Input AC 120V, 220~240V Output DC 7.2V, 120mA	
Accessory		Torque measuring adaptorX2 SJ-10K / SJ-50	Torque measuring adaptorX2 SJ-3 / SJ-10	Torque measuring adaptorX1 J-50S	

Idly Rotating Torque Screwdrivers

Idly rotation prevents excessive tightening at the torque setting. Not fatigued with long time use.

(Kgf.cm) type

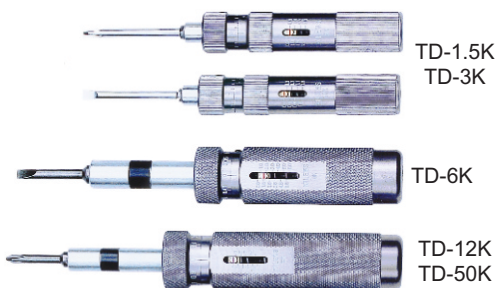

- Light and short, easy to operate, and favorable sound and touch sensibility at idly rotation.
- Set up required torque value and tightened, everyone can tighten in the same way.
- When reaching specified torque, the clutch will be released automatically, and idly rotated, therefore this action prevents excessive tightening.
- Accuracy : ± 3%

Specifications

Model	Torque (Right & Left)	Grad.	Grip Dia.	Total Length (without bit)	Weight	Attachment		
						Bit		
LTDK	kgf.cm		Φmm	mm	g	⊕	⊖ (thickness x width)	
TD-1.5K	0.1~1.5	0.01	16	86	45	No.1	0.4X3.5	Original
TD-3K	0.2~3	0.02						
TD-6K	0.5~6	0.05	25	108	90	No.1 (4Φ)	0.4X0.4	Common with marketed products
TD-12K	2~12	0.1	30	140	150			
TD-20K	4~20	0.1	34	160	210			
TD-30K	4~30	0.1						
TD-50K	10~50	0.25	40	200	440	No.2 (7Φ)	1.0X7.0	
TD-100K	20~100	0.5	45	235	790			